
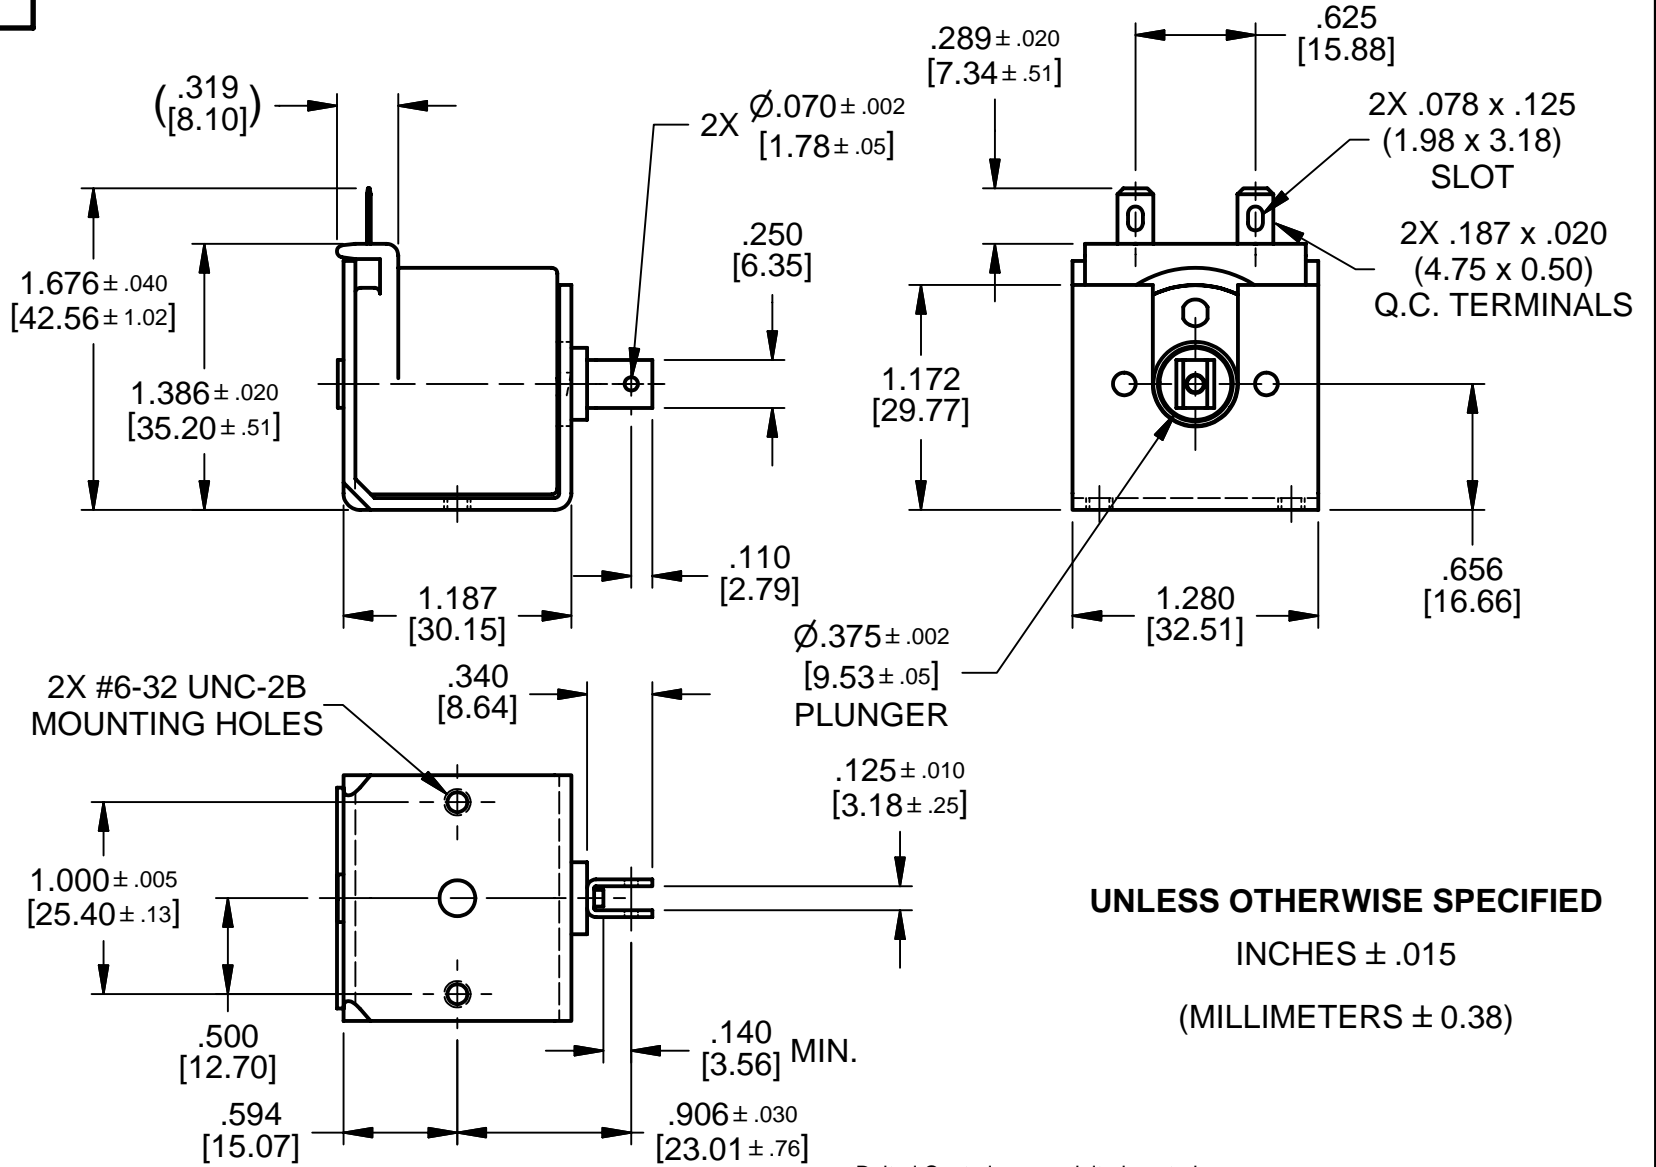


DWG. No. **A** C-8 SOLENOID




**UNLESS OTHERWISE SPECIFIED**  
 INCHES ± .015  
 (MILLIMETERS ± 0.38)

Deltrol Controls, www.deltrol-controls.com  
 2740 S. 20th St. | Milwaukee, WI 53215 | Phone: 414.671.6800 Fax: 414.671.6809


				MATERIAL	TOLERANCE (UNLESS SHOWN)	SCALE		NAME	
				FINISH	.XXX _____	DATE		C-8 SOLENOID DIMENSIONAL DRAWING	
				FIRST USED ON:	.XX _____	3/20/2006			
REV.	DESCRIPTION	DATE	BY		DEG. _____	DR. BY	BC	MILWAUKEE, WI. U.S.A.	
					◊ CRITICAL DIMENSIONS PER ANSI/ASME Y14.5-1994	CKD BY			
					TOOL No.	APPR. BY	I	DWG. NO. A	
								C-8 SOLENOID	REV

# C-8 FORCE CURVES (CLASS A)


## AC CONTINUOUS DUTY - 9.5 VA

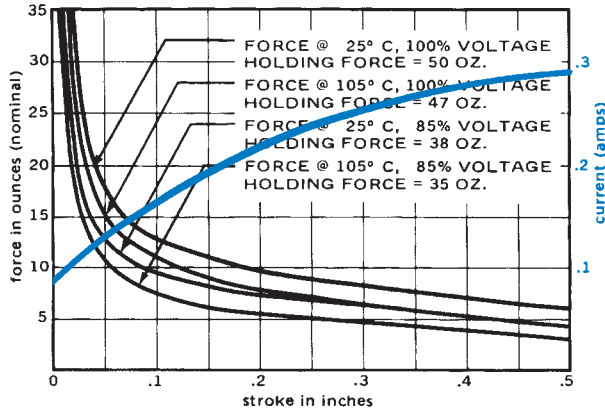


## DC CONTINUOUS DUTY - 6.5 WATTS

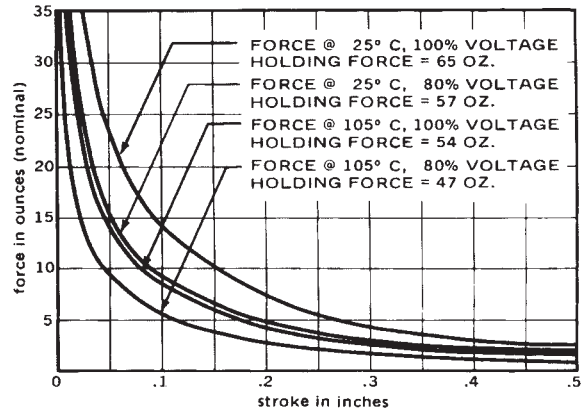


## AC INTERMITTENT DUTY - 25VA

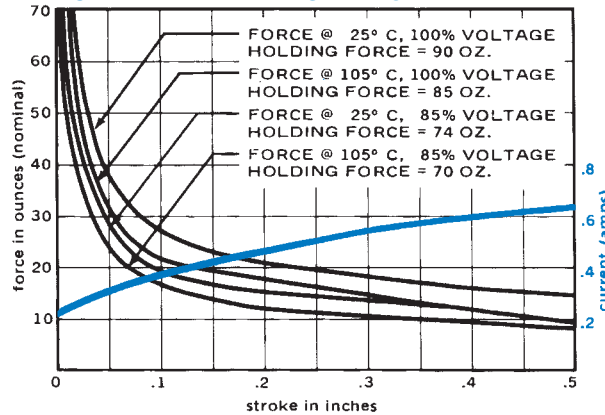


## DC INTERMITTENT DUTY - 16 WATTS

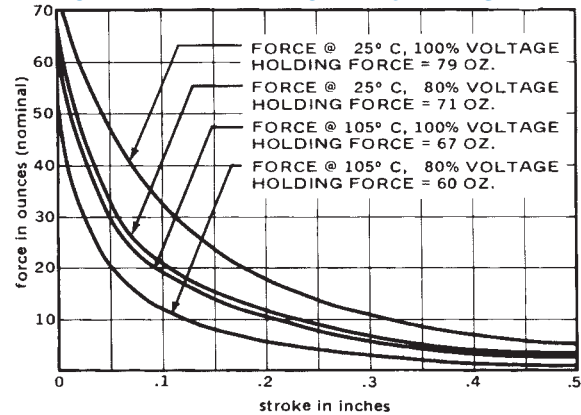

## AC PULSE DUTY - 95VA

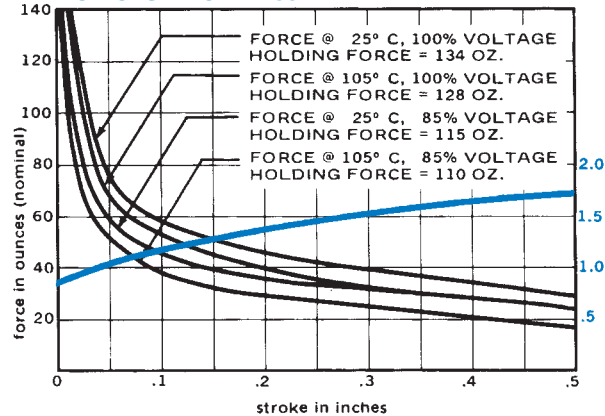

## DC PULSE DUTY - 65 WATTS

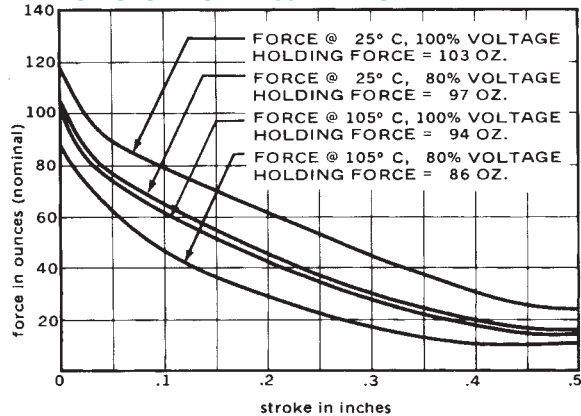

Standard intermittent duty cycle at nominal voltage is 25%, with 3 minutes maximum ON and 9 minutes minimum OFF in a repetitive cycle. Standard pulse duty cycle is 10% with 100 milliseconds ON and 900 milliseconds OFF.

Deltrol Controls, www.deltrol-controls.com  
2740 S. 20th St. • Milwaukee, WI 53215 Phone (414) 671-6800 • Fax (414) 671-6809

REV.	DESCRIPTION	DATE	BY	SCALE

**DELTRON**  
*controls* /   
Milwaukee, WI U.S.A.

NAME  
**C-8 SOLENOID  
FORCE CURVES**

DRAWING NO. **C-8 FORCE CURVES**

REV.