





# MED 24x2.4 FORCE CURVES (CLASS B)


## DC CONTINUOUS DUTY - 14 WATTS

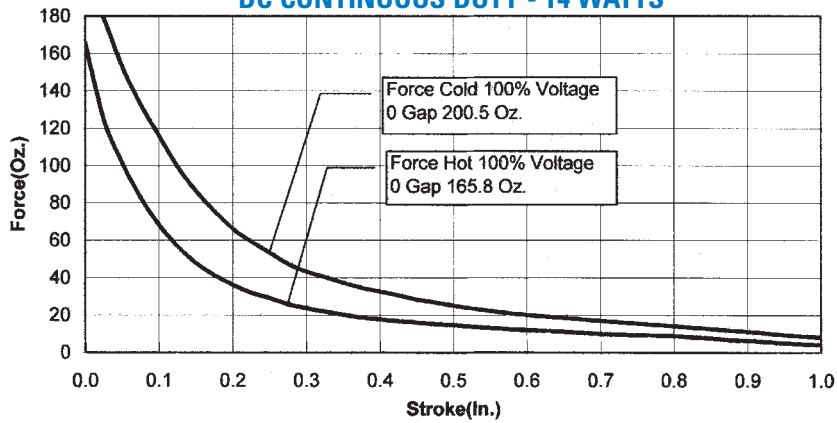

## DC INTERMITTENT DUTY - 40 WATTS

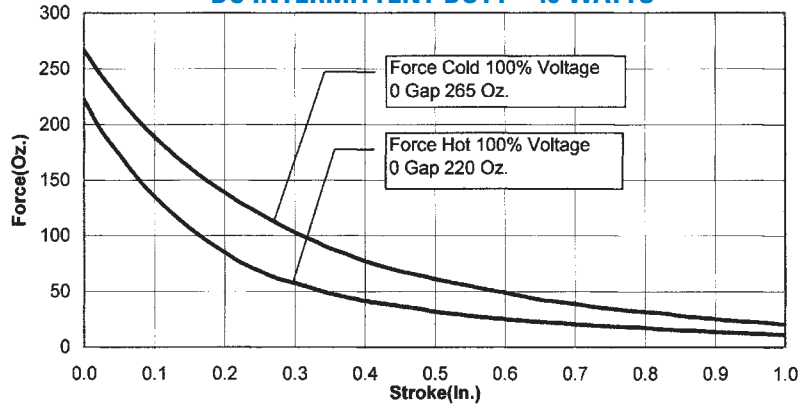


## DC PULSE DUTY - 140 WATTS

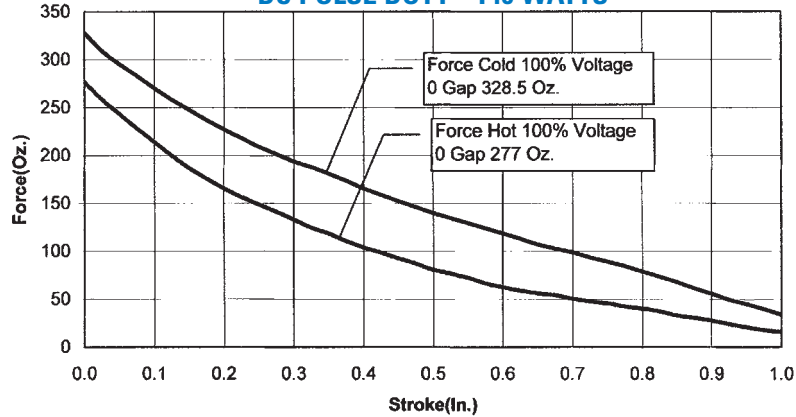

Standard intermittent duty cycle at nominal voltage is 1 minute ON and 3 minutes OFF. Standard pulse duty cycle is 100 milliseconds ON and 900 milliseconds OFF.  
 NOTE: Cold Force @ 25°C (77°F) Coil Temperature,  
 Hot Force @ 130°C (266°F) Coil Temperature,  
 NOTE: Approximate 36 sq. in. Heat Sink Required

Deltrol Controls, www.deltrol-controls.com  
 2740 S. 20th St. • Milwaukee, WI 53215 Phone (414) 671-6800 • Fax (414) 671-6809

REV.	DESCRIPTION	DATE	BY	SCALE	 Milwaukee, WI U.S.A.	NAME
				DATE		<b>MED 24x2.4 FORCE CURVES</b>
				DR. BY		
				CHECKED BY		
				APPROVED BY		
				DRAWING NO.	<b>MED 24x2.4 FORCE CURVES</b>	REV.